

PORTABLE CONCRETE PUMPS "7" Series

Description

A complete range, whether on small job sites, shotcrete pumping or big civil works.


In every situation, these pumps all have the basic characteristics of stability, low running costs and pumping consistency.

Available in diesel or electric version, noiseless or flameproof.

All pumps are provided with excellent standard supply, complete with a wide choice of accessories which determine their versatility, making them ideal for work on big job-sites outside town and in town centres.



Dimensions and performance diagrams

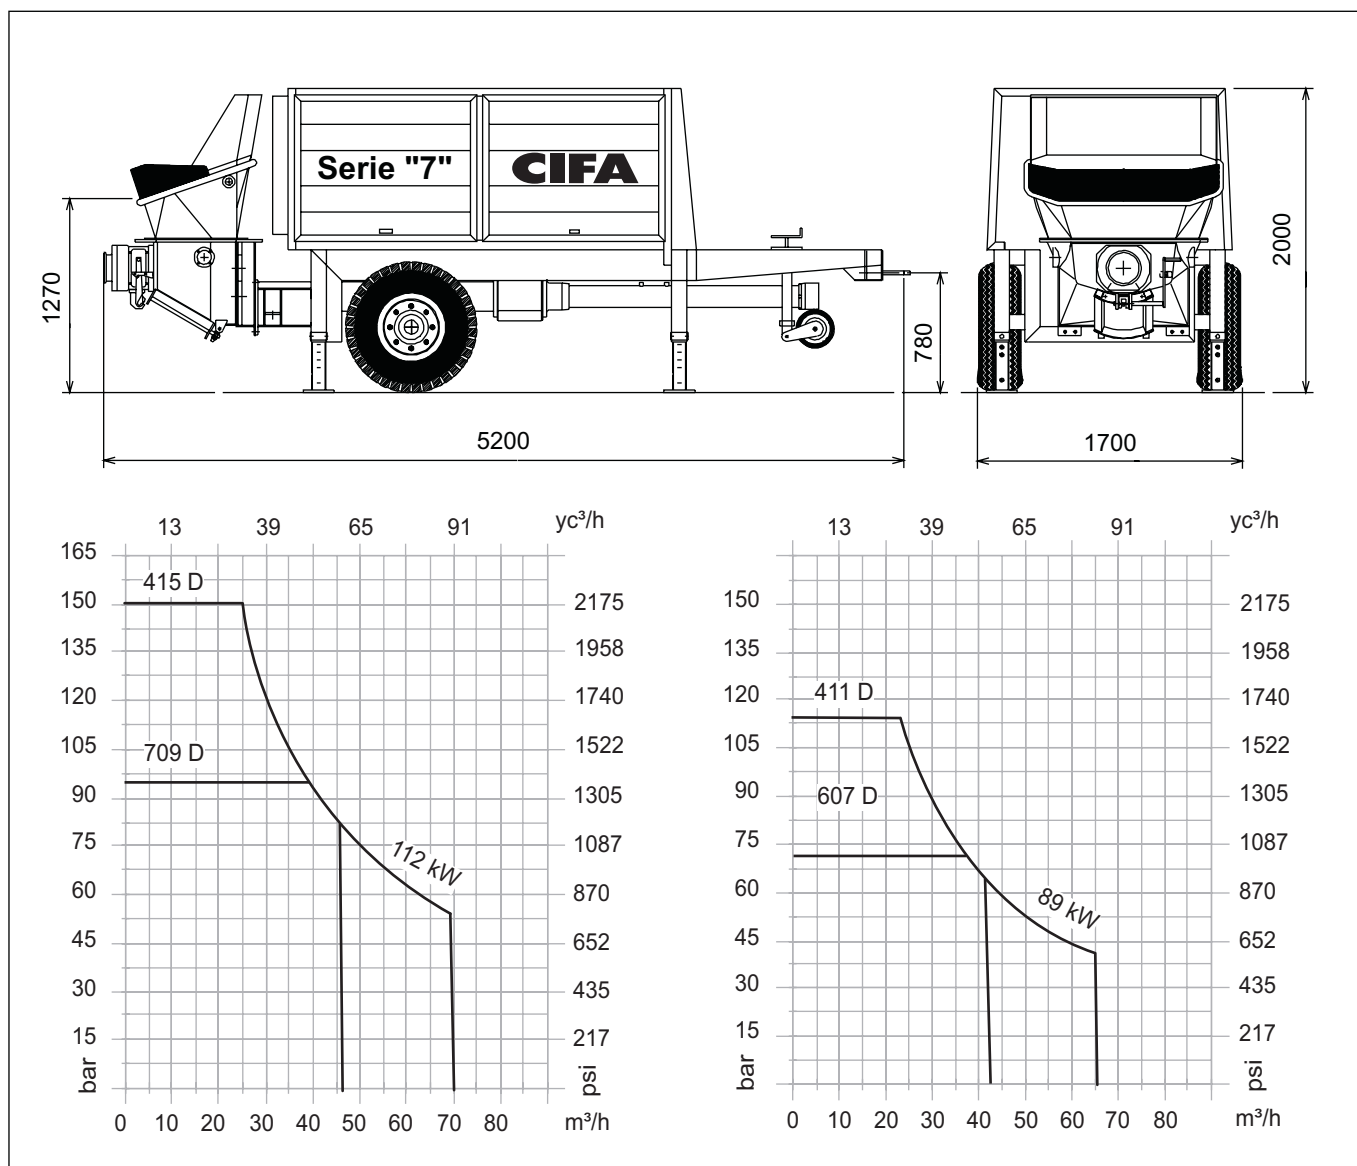

PORTABLE CONCRETE PUMPS

"7" Series

Main features

The Cifa portable concrete pump series offers a wide range of models which satisfy the various needs of concrete pumping and handling both in tunnels and above ground, over long distances and at considerable heights.

The Cifa original pumping unit presents characteristics of resistance, long life and exceptional performances with any type of concrete.

All have a rigid monoaxle trailer complete with drawbar, four manual adjustable outriggers and two rubber wheels.

The power source is a separate engine (Diesel or Electric). The main pump is an axial piston type with variable capacity and constant power. Gear pump for auxiliary services.

- "S" shaped valve for any type of concrete, with special steel and different thicknesses
- Rapid valve exchange
- Ideal operation even at high pressures with continuous and smooth pumping flow
- Automatic wear compensation
- Hydraulic system in open circuit
- Transformation of the pumping units from high to low pressure or viceversa
- Low noise
- Low running costs
- Easy maintenance and quick cleaning operations

Standard equipment

- Rigid monoaxle trailer
- Drawbar
- N° 4 manual outriggers
- Concrete outlet piping with bend and counterbend reduction device up to 5"
- Hydraulically driven water pump 70 lt/min - 20 bar
- Concrete flow rate regulator on board
- Washing pipe complete with nozzle
- Connection flange for washing
- N° 2 sponge rubber balls
- Remote control with 20m cable
- Acoustic signal for diesel engine breakdown
- One colour painting

Optionals

- Electric vibrator on the hopper grid
- Hydraulically controlled air compressor, bicilindrical, two-stage capacity 700 l/min intaken, max. pressure 10/12 bar, complete with accessories, stopballs cage and stub pipe
- Stopballs cage and stub pipe diam. 5.5" with joint
- Stopper for cleaning and feeding concrete pipeline
- Catalytic silencer for Deutz engines

Technical data portable concrete pumps "7" series

MODEL		PC 607	PC 411	PC 709	PC 415
Drive power D/E	<i>kW</i>	89/75	89/75	112/110	112/110
Max. theoretical output	<i>m³/h</i>	65	43	70	46
Max. pressure on concrete	<i>bar</i>	72	112	94	150
Max. number of cycles per minute		30	20	32	21
Concrete cylinders (diam. x stroke)	<i>mm</i>	176x1500	176x1500	176x1500	176x1500
Concrete hopper capacity	<i>l</i>	400	400	400	400
Rod side drive <input type="checkbox"/> / Piston side drive <input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Technical data and characteristics subject to modifications without notice

All CIFA portable concrete pumps are "CE" branded, according to the Machinery Directive 89/392 EEC.



CIFA S.p.A.
via Stati Uniti d'America, 26
20030 Senago (Milano) - Italia
tel.: +39.02.990131 - fax: +39.02.9981157
www.cifa.com

